

Bilaga 3

CPT-utvärdering

CPT - test

Project Västra Vägen 216638		Site Designation 103 Date 080909																																																																																			
Predrilling depth 1,00 m Start depth 0,00 m Stop depth 10,00 m Ground water level 1,10 m Reference my Level at reference 14,80 m	Predrilled material Geometry Normal Fluid in filter Operator Equipment <input checked="" type="checkbox"/> Porepressure measurement																																																																																				
Calibration data Cone 3140 Internal friction O_c 0,0 kPa Date 20080731 Internal friction O_f 0,0 kPa Areafactor a 0,580 Cross talk c_1 0,000 Areafactor b 0,013 Cross talk c_2 0,000		Cero values, kPa <table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>Porepressure</th> <th>Friction</th> <th>Tip resistance</th> </tr> </thead> <tbody> <tr> <td>Before</td> <td>100,00</td> <td>0,00</td> <td>0,00</td> </tr> <tr> <td>After</td> <td>99,00</td> <td>0,00</td> <td>10,00</td> </tr> <tr> <td>Diff</td> <td>-1,00</td> <td>0,00</td> <td>10,00</td> </tr> </tbody> </table>			Porepressure	Friction	Tip resistance	Before	100,00	0,00	0,00	After	99,00	0,00	10,00	Diff	-1,00	0,00	10,00																																																																		
	Porepressure	Friction	Tip resistance																																																																																		
Before	100,00	0,00	0,00																																																																																		
After	99,00	0,00	10,00																																																																																		
Diff	-1,00	0,00	10,00																																																																																		
Scale factors <table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">Porepressure</th> <th colspan="2">Friction</th> <th colspan="2">Tip resistance</th> </tr> <tr> <th>Range</th> <th>Code</th> <th>Range</th> <th>Code</th> <th>Range</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td> </td> <td> </td> <td> </td> <td> </td> <td> </td> <td> </td> </tr> </tbody> </table>		Porepressure		Friction		Tip resistance		Range	Code	Range	Code	Range	Code							Correction Porepressure (none) Friction (none) Tip resistance (none) Estimated sounding class																																																																	
Porepressure		Friction		Tip resistance																																																																																	
Range	Code	Range	Code	Range	Code																																																																																
<input type="checkbox"/> Use scale factors																																																																																					
Porepressure observations <table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th>Depth (m)</th> <th>Porepressure (kPa)</th> </tr> </thead> <tbody> <tr><td>1,10</td><td>0,00</td></tr> <tr><td>4,02</td><td>33,30</td></tr> <tr><td>7,03</td><td>65,70</td></tr> <tr><td>10,83</td><td>115,40</td></tr> </tbody> </table>		Depth (m)	Porepressure (kPa)	1,10	0,00	4,02	33,30	7,03	65,70	10,83	115,40	Boundaries <table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th>Depth (m)</th> </tr> </thead> <tbody> <tr><td> </td></tr> </tbody> </table>		Depth (m)		Classification <table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">Depth (m)</th> <th>Density</th> <th rowspan="2">Liquid limit</th> <th rowspan="2">Soil</th> </tr> <tr> <th>From</th> <th>To</th> <th>(ton/m^3)</th> </tr> </thead> <tbody> <tr><td>0,00</td><td>0,20</td><td>1,80</td><td>0,00</td><td>mu(sa)Sit vx</td></tr> <tr><td>0,20</td><td>0,30</td><td> </td><td>0,00</td><td>siLet (muSi)</td></tr> <tr><td>0,30</td><td>1,20</td><td>0,00</td><td>0,00</td><td>mu(si)grSa Sit</td></tr> <tr><td>1,20</td><td>1,70</td><td>0,00</td><td>0,00</td><td>saleSi sk(st)</td></tr> <tr><td>2,00</td><td>3,00</td><td>1,52</td><td>0,72</td><td>siLe</td></tr> <tr><td>3,00</td><td>4,00</td><td>1,63</td><td>0,51</td><td>siLe</td></tr> <tr><td>4,00</td><td>5,00</td><td>1,58</td><td>0,56</td><td>siLe</td></tr> <tr><td>5,00</td><td>6,00</td><td>1,67</td><td>0,44</td><td>(sa)siLe (gr)</td></tr> <tr><td>6,00</td><td>7,00</td><td>1,66</td><td>0,48</td><td>siLe_sk_</td></tr> <tr><td>7,00</td><td>8,00</td><td>1,67</td><td>0,55</td><td>siLe</td></tr> <tr><td>8,00</td><td>9,00</td><td>1,78</td><td>0,43</td><td>siLe (grsk)</td></tr> <tr><td>9,00</td><td>10,00</td><td>1,94</td><td>0,31</td><td>leSi (sk_si_)</td></tr> </tbody> </table>		Depth (m)		Density	Liquid limit	Soil	From	To	(ton/m^3)	0,00	0,20	1,80	0,00	mu(sa)Sit vx	0,20	0,30		0,00	siLet (muSi)	0,30	1,20	0,00	0,00	mu(si)grSa Sit	1,20	1,70	0,00	0,00	saleSi sk(st)	2,00	3,00	1,52	0,72	siLe	3,00	4,00	1,63	0,51	siLe	4,00	5,00	1,58	0,56	siLe	5,00	6,00	1,67	0,44	(sa)siLe (gr)	6,00	7,00	1,66	0,48	siLe_sk_	7,00	8,00	1,67	0,55	siLe	8,00	9,00	1,78	0,43	siLe (grsk)	9,00	10,00	1,94	0,31	leSi (sk_si_)
Depth (m)	Porepressure (kPa)																																																																																				
1,10	0,00																																																																																				
4,02	33,30																																																																																				
7,03	65,70																																																																																				
10,83	115,40																																																																																				
Depth (m)																																																																																					
Depth (m)		Density	Liquid limit	Soil																																																																																	
From	To	(ton/m^3)																																																																																			
0,00	0,20	1,80	0,00	mu(sa)Sit vx																																																																																	
0,20	0,30		0,00	siLet (muSi)																																																																																	
0,30	1,20	0,00	0,00	mu(si)grSa Sit																																																																																	
1,20	1,70	0,00	0,00	saleSi sk(st)																																																																																	
2,00	3,00	1,52	0,72	siLe																																																																																	
3,00	4,00	1,63	0,51	siLe																																																																																	
4,00	5,00	1,58	0,56	siLe																																																																																	
5,00	6,00	1,67	0,44	(sa)siLe (gr)																																																																																	
6,00	7,00	1,66	0,48	siLe_sk_																																																																																	
7,00	8,00	1,67	0,55	siLe																																																																																	
8,00	9,00	1,78	0,43	siLe (grsk)																																																																																	
9,00	10,00	1,94	0,31	leSi (sk_si_)																																																																																	
Notes Importerat information från kv103																																																																																					

V:\UPPDRAG\216638\16knikIGL_Text\103.CPW


CPT test evaluated according to SGI Information 15 rev. 2007

Reference my
 Ground water level 14,80 m
 Grundvattentyta 1,10 m
 Start depth 0,00 m

Predrilling depth 1,00 m
 Predrilled material Equipment
 Geometry Normal

Evaluator Hanna Karlström
 Evaluation date 080924


Project Västra Vägen
 Project nr 216638
 Site
 Designation 103
 Date 080909

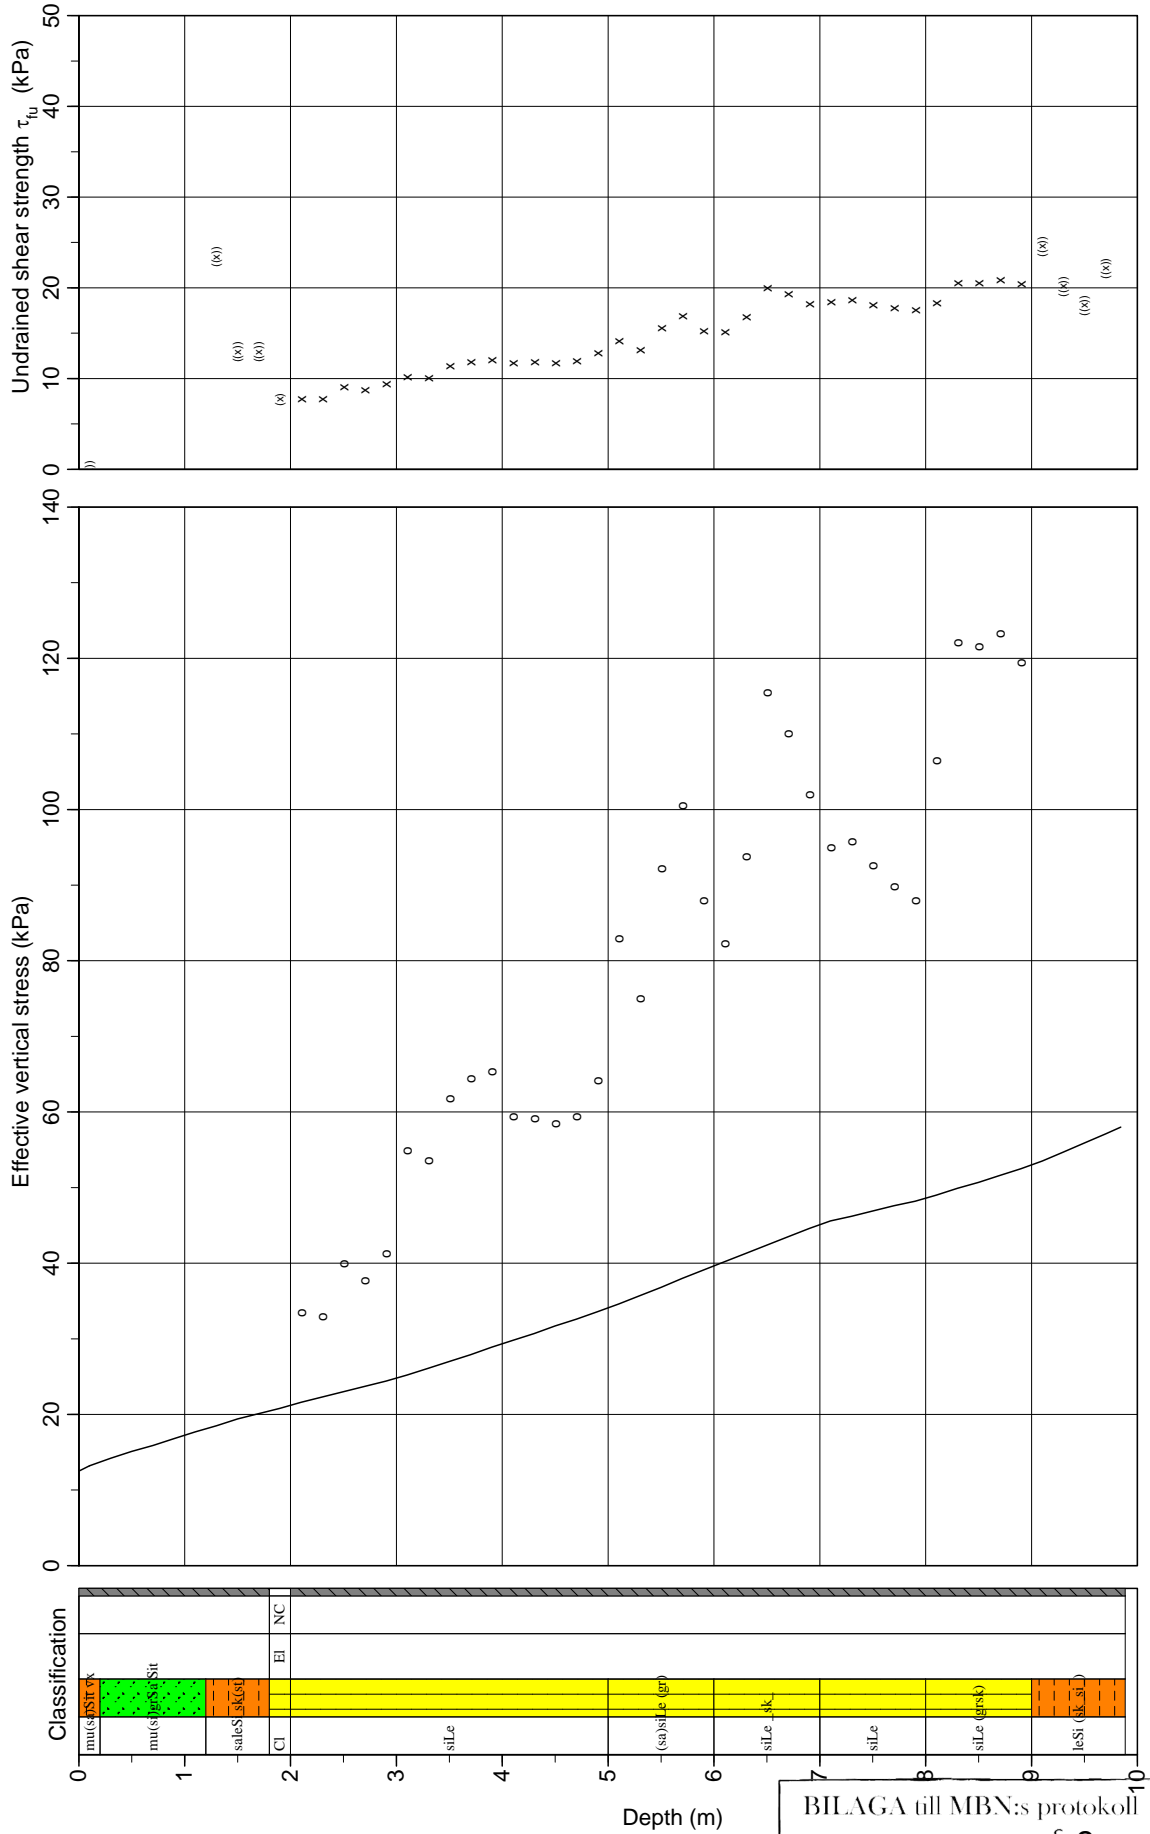

CPT-test performed according to EN ISO 22476-1

Predrilling depth	1,00 m	Reference	my	Fluid in filter	
Start depth	0,00 m	Level at reference	14,80 m	Coordinates	
Stop depth	10,00 m	Predrilled material		Equipment	
Ground water level	1,10 m	Geometry	Normal	Cone nr	3140

Project Västra Vägen
 Project nr 216638
 Site
 Designation 103
 Date 080909

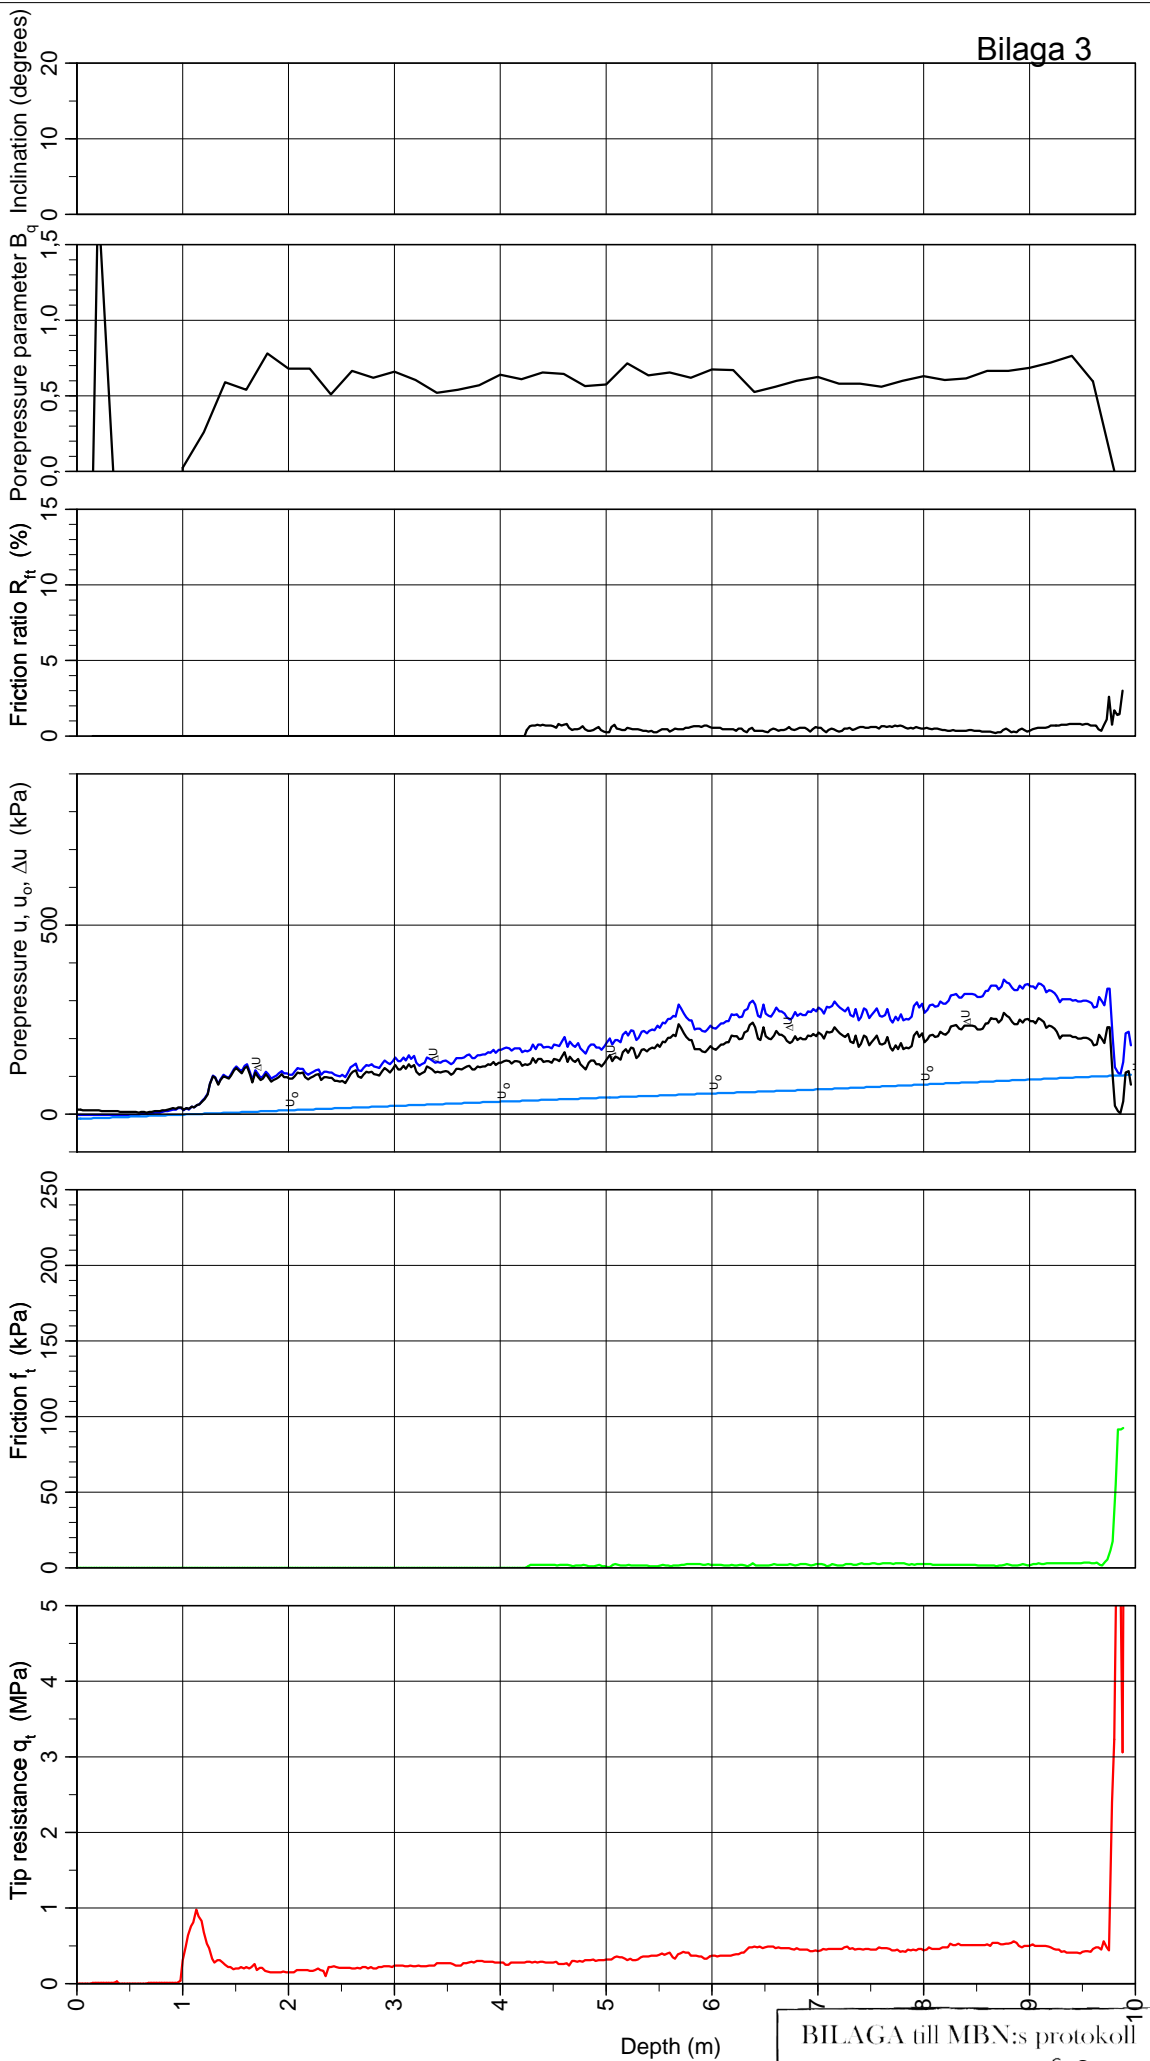

Bilaga 3